
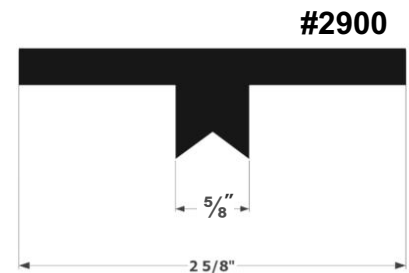
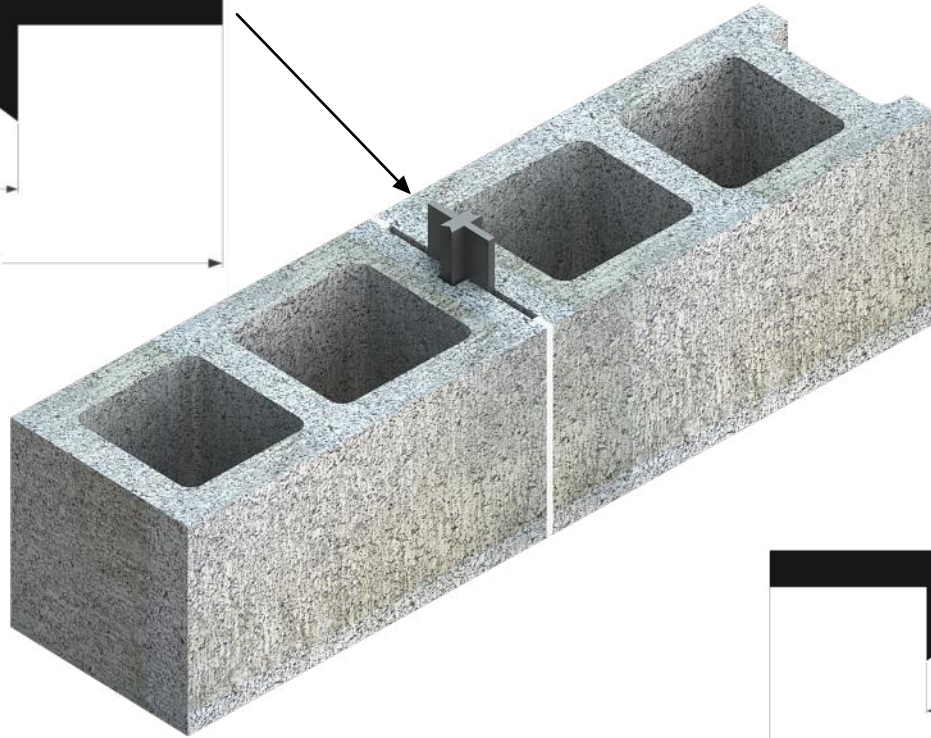


PRODUCT SUBMITTAL

PVC Control Joint

WIRE-BOND

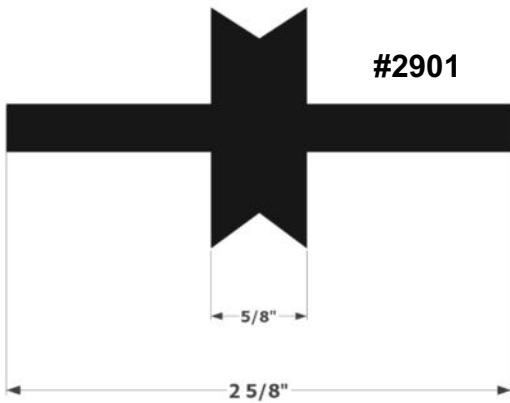

MATERIAL CONFORMANCE / PROPERTY VALUES

Extruded from a specially formulated PVC compound with **85 durometer hardness** conforming to **ASTM D2287 Type 654, ASTM D 2240**. It is designed for use in solid or cavity masonry wall construction at pilasters, columns, intersections or other joints. In long walls, control joints at 30 feet intervals are recommended to provide resilient resistance to cracking under stress of expansion and contraction.

Property	Nominal Value
Durometer hardness, A scale	85 - 94
Specific Gravity (nominal) 73°F/23°C	1.35 - 1.39
Tensile Strength, min:	1575 psi



SIZES

PVC Control Joint

2901 - Standard 2900 - ' T '

Recommended Spacing Of Control Joints

Vertical Spacing Of Joint Replacement

	None	24"	16"	8"
Express as ratio of panel length to height 1/h	2	2-1/2"	3"	4"
With panel length (l) not to exceed regardless of height	40	45	50'	60'



www.wirebond.com

Distributed by:
MasonAccess.com
 (800) 924-6802