

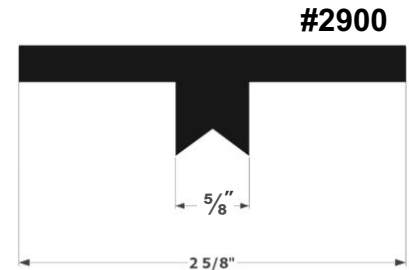



PRODUCT SUBMITTAL

Rubber Control Joint

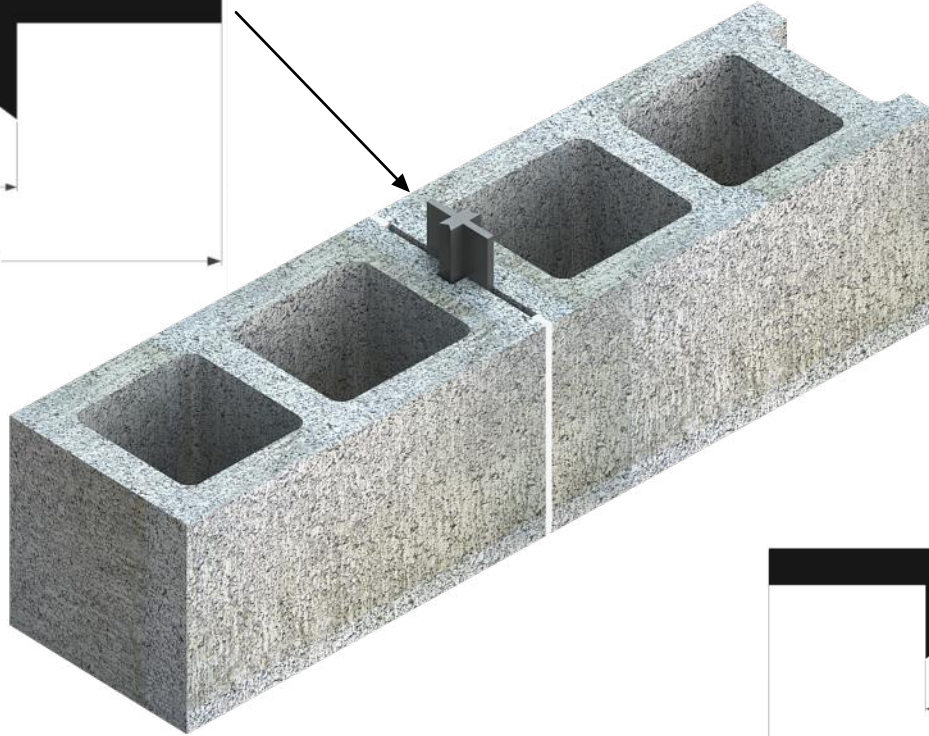

MATERIAL CONFORMANCE / PROPERTY VALUES		SIZES				
<p>Rubber Control Joints allow for expansion and contraction of masonry walls while reducing the possibility of air and water penetration. Designed for masonry walls at control joint. ASTM D 2000 2 AA 805 ASTM D 2240</p>		<p>Rubber Control Joint</p> <p><input type="checkbox"/> 2901 - Standard <input type="checkbox"/> 2900 - ' T '</p>				
<p>Property</p> <p>Tensile-Strength</p> <p>Modulus @ 100 elongation, psi</p> <p>Specific Gravity</p> <p>Ultimate</p> <p>Elongation-Sheet</p> <p>Water Absorption</p> <p>Brittle Point (calculated)</p> <p>Hardness-Shore A/10</p>	<p>Nominal Value</p> <p>2425 psi</p> <p>1100</p> <p>1.32</p> <p>375%</p> <p>per ASTM D 570</p> <p>-10° F</p> <p>85</p> <p>+/- 5</p>	<p>Recommended Spacing Of Control Joints</p>	<p>Vertical Spacing Of Joint Replacement</p>			
		<p>Express as ratio of panel length to height 1/h</p> <p>With panel length (l) not to exceed regardless of height</p>	<p><i>None</i></p> <p><i>2</i></p> <p><i>40</i></p>	<p><i>24"</i></p> <p><i>2-1/2"</i></p> <p><i>45</i></p>	<p><i>16"</i></p> <p><i>3"</i></p> <p><i>50'</i></p>	<p><i>8"</i></p> <p><i>4"</i></p> <p><i>60'</i></p>

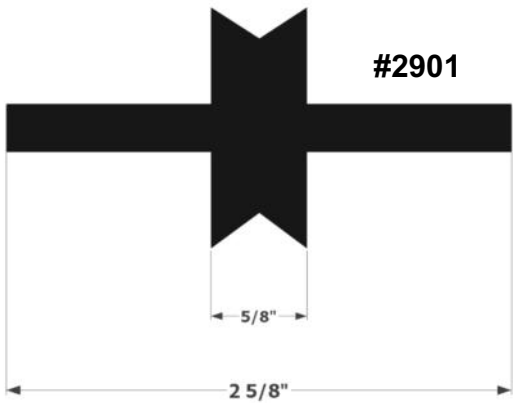

www.wirebond.com

Distributed by:
MasonAccess.com
 (800) 924-6802