




UltraCon® Masonry Fasteners

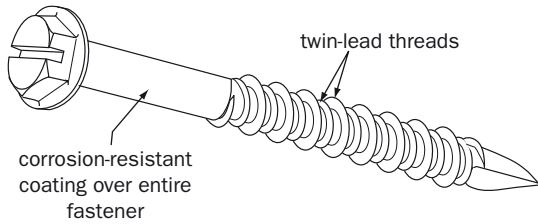

Features

- Fastener threads mechanically link to masonry, increasing joint integrity
- Available in 3/16" to 5/16" diameters, 1" to 6" lengths

Benefits

- When all three elements of the system (cold formed fasteners, precision-cut Elco® carbide drill bits and high-quality UltraCon® installation tools) are used, consistent performance and maximum pull-out strengths can be realized
- Installs quickly, 2 to 3 fasteners per minute, when using UltraCon® installation tools

SPECIFICATIONS

UltraCon® Masonry Fasteners

Application:

Concrete, brick or hollow block

- Electrical boxes and clips to masonry
- Wood headers, plywood, or furring strips to masonry
- Window frames

Specification:

Carbon steel fasteners with dual-lead thread and a corrosion-resistant finish

Listings/Approvals:

- Miami-Dade, Florida Notice of Acceptance No. 04-0721.01 Exp. 1/8/11

Diameters:

3/16" to 5/16"

Lengths:

1" to 6"

Head Styles:

Hex, hex flange, flat, button and TrimFit® head

Drive Systems:

Hex, phillips, and tamper-resistant TORX® Drive

Thread Form:

Twin-lead thread

Point Type:

Nail

Finish:

Blue Stalgard® corrosion resistant finish standard (also available in silver or white on selected sizes); withstands a minimum of 800 hours salt spray per ASTM B117

Installation Tools:

1000 Tool – for installing all sizes and styles of UltraCon® fasteners

Economy Tool – for installation of UltraCon® fasteners up to 4" in length

Specialty Tool – for installation of 1/4" diameter hex washer head UltraCon® fasteners up through 1-3/4"

For more information, contact

Elco Construction Products • 1.800.435.7213