

PRODUCT SUBMITTAL



PTA #4301 (Partition Top Anchor)


PTA #4301


Average
Shear Load:
4,400 (lbs)



PTA Tube

PTA tube with expansion filler is placed over the anchor to allow deflection. Joint is filled with mortar, fully surrounding the tube.

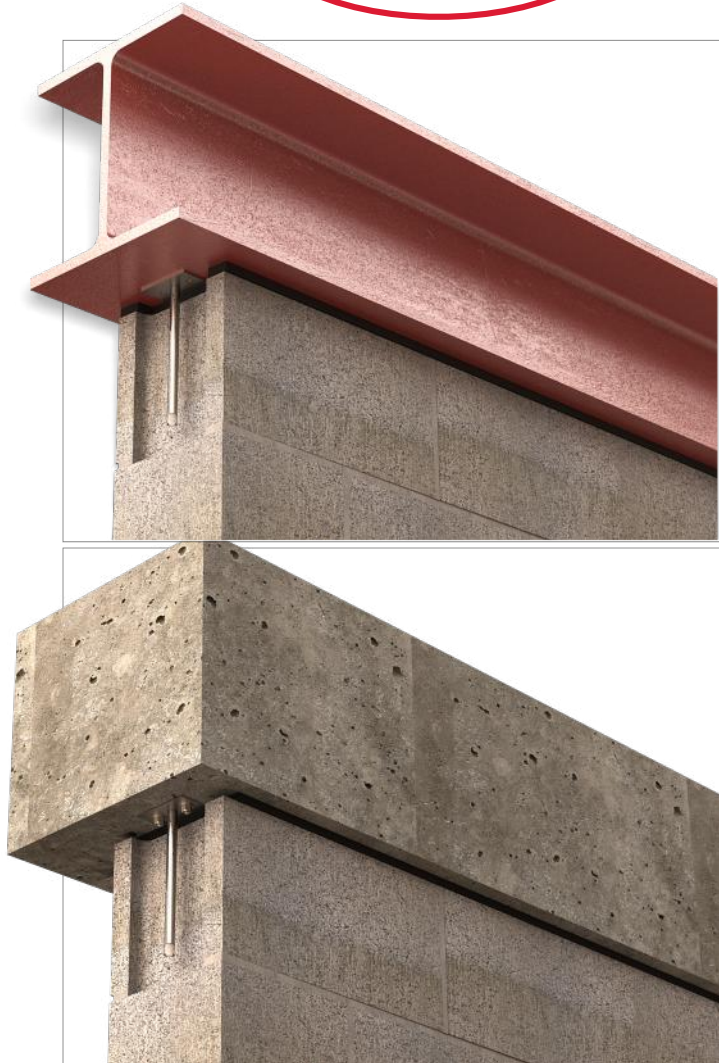

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M ROD: ASTM A1064/A1064M</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 TUBE: Clear Butyrate ASTM D542 , D148 , D696 , D257</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p>#4301 Plate: 12 gauge x 2" x 3" 1/4" thick x 2" x 3"</p> <p>ROD: 3/8" x 7"</p> <p>PTA TUBE: Fits over Rod</p> <p>FINISHES: Hot Dip Galvanized Stainless Steel</p>



www.wirebond.com

Distributed by:
MasonAccess.com
(800) 924-6802