


Z-Straps

Masonry to Masonry



Shear Wall Conditions

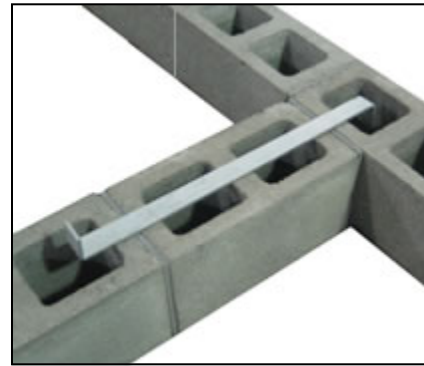

Product Information:

Uses:

- Anchoring masonry to masonry for bearing and shear intersecting perpendicular CMU walls.

Dimension:

- 1-1/2" x 1/4" x 2" x 24" x 2"

Finish:

- Hot Dip Galvanized after fabrication/ Zinc Coating
ASTM A153/A153M-B2 (1.50 oz. per square foot)

Advantages:

- Code approved for transfer of shear between intersecting walls to be connected
1-1/2" x 1/4" x 2" x 24" x 2"

Consult structural engineer to verify width, thickness, length and placement requirements.

For technical assistance call us toll free at 1-800-924-6802.