


PRODUCT SUBMITTAL



3403 Figure 8 Single Rebar Positioner
For 12 inch CMU

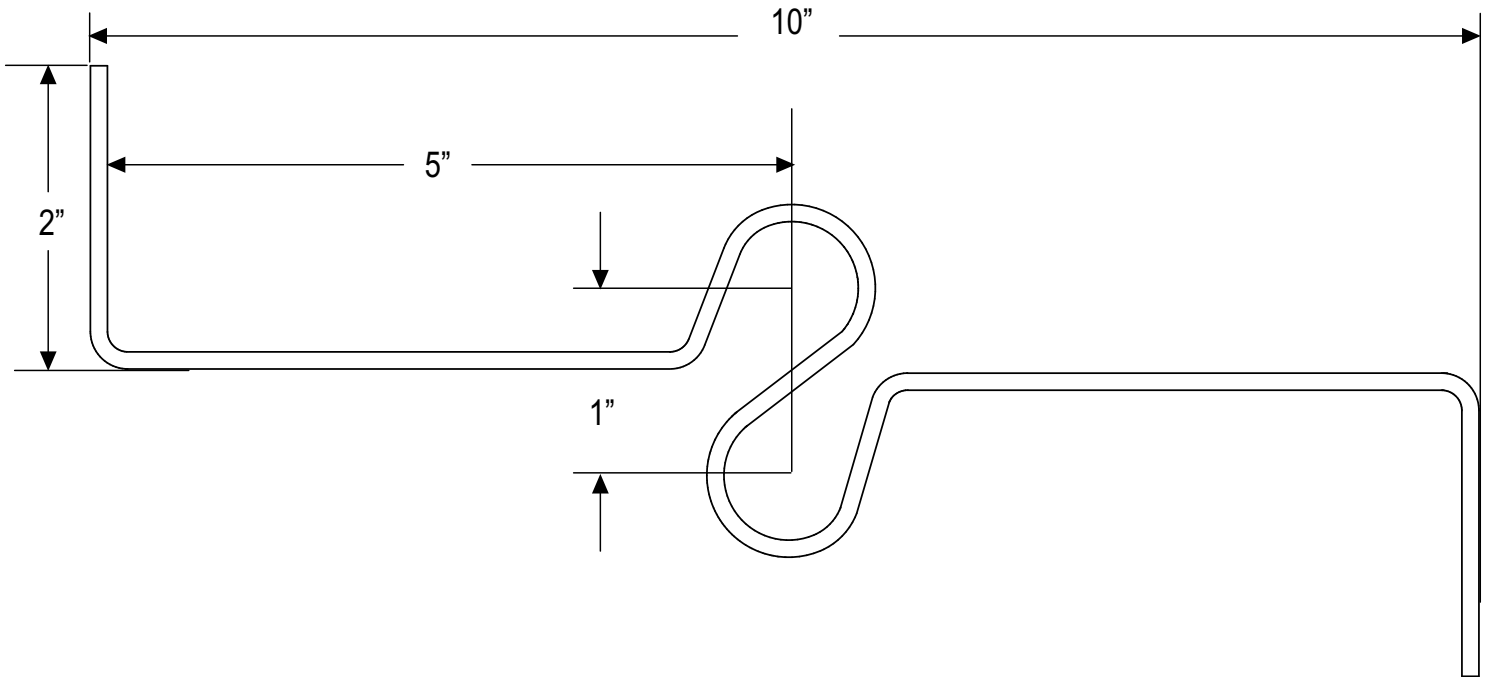

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)** Hot Dip

Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel (WIRE) **ASTM A580 / ASTM A580M**
Stainless Steel (SHEET METAL) **ASTM A167 Type 304**
(Type 316 available on special order)



Recycled Content:
Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%

3404 : 9 gauge dia. 10 inch for 12 inch CMU

FINISH:

- Mill Galvanized
- Hot Dip Galvanized
- Stainless Steel



www.wirebond.com

Distributed by:
MasonAccess.com
(800) 924-6802