



PRODUCT SUBMITTAL



3404 Figure 8 Double Rebar Positioner
For 8 inch CMU

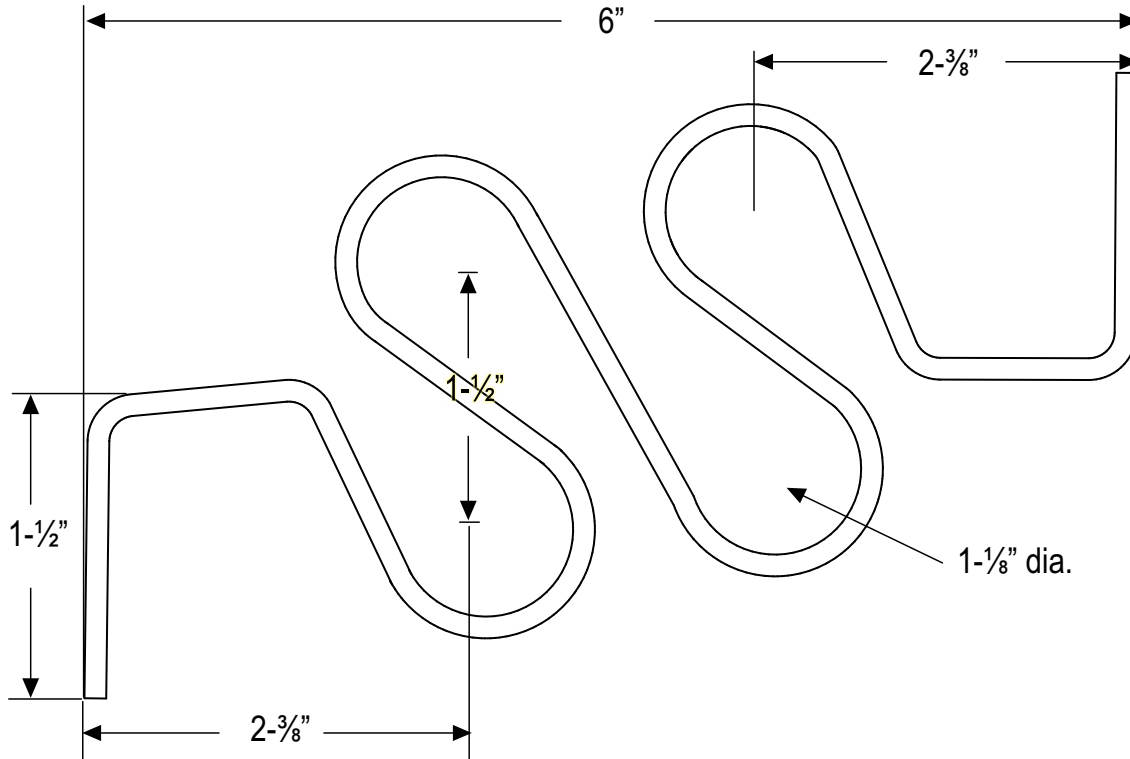

<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip</p> <p>Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304 (Type 316 available on special order)</p>  <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p># 3404 : 9 gauge dia. 6 inch for 8 inch CMU</p> <p>FINISH:</p> <ul style="list-style-type: none"> Mill Galvanized Hot Dip Galvanized Stainless Steel
--	--



www.wirebond.com

Distributed by:
MasonAccess.com
(800) 924-6802