


PRODUCT SUBMITTAL


WIRE-BOND


#3410 Corelock Rebar Positioner

Patent No. US 8,122,675 B2

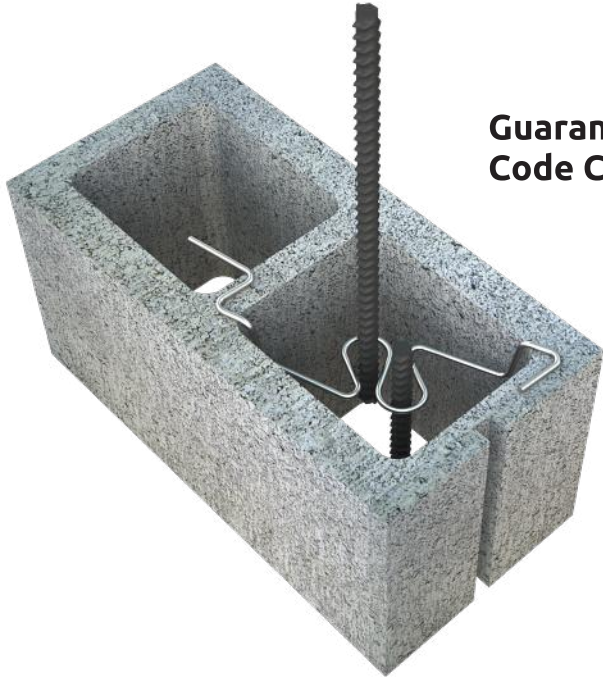

**Guarantees
Code Compliance**

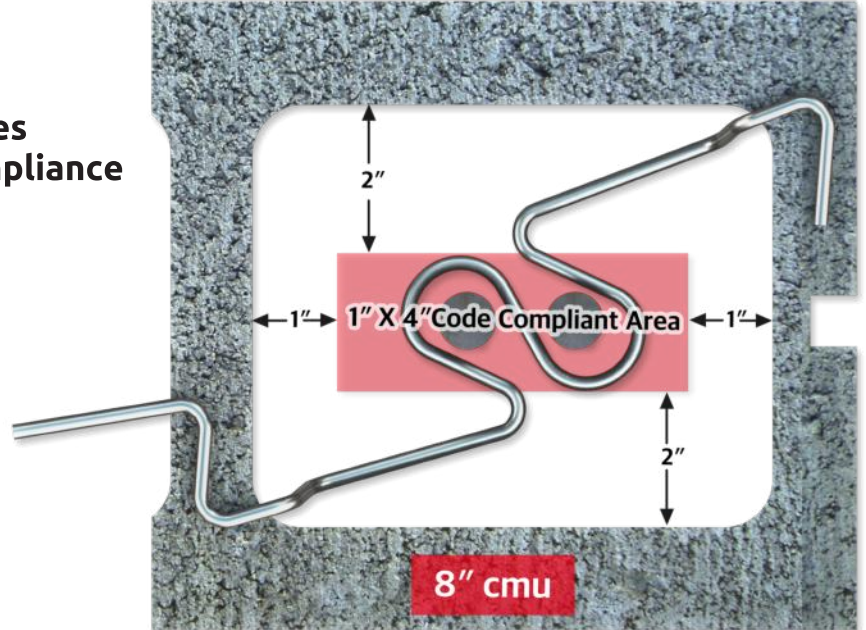

| MATERIAL CONFORMANCE | SIZES / FINISHES |
|---|---|
| <p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to ASTM A1064/A1064M, ASTM A82/ A82M</p> <p>Tensile Strength - 80,000 p.s.i. Yield Point - 70,000 p.s.i. minimum</p> <p>ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p>ACI / ASCE 530 (Building Code Requirements for Masonry Structures)</p> <p>Hot-Dip Galvanized after fabrication: ASTM A153/A153M-B2 (1.5 oz/ft)</p> <p>Wire (Stainless Steel): ASTM A580/ASTM 580M - AISI Type 304 (Type 316 available on special orders)</p> <p>Recycled Content: Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p>Stainless Steel 97% Pre-Consumer V O C Content - 0%</p>  | <p># 3410 Corelock: 9 gauge diameter standard</p> <p># 3410 Size:</p> <p>for 8" cmu</p> <p>for 6" cmu</p> <p>Finishes:</p> <p>Mill Galvanized Hot Dip Galvanized Stainless Steel</p> |

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113