



PRODUCT SUBMITTAL

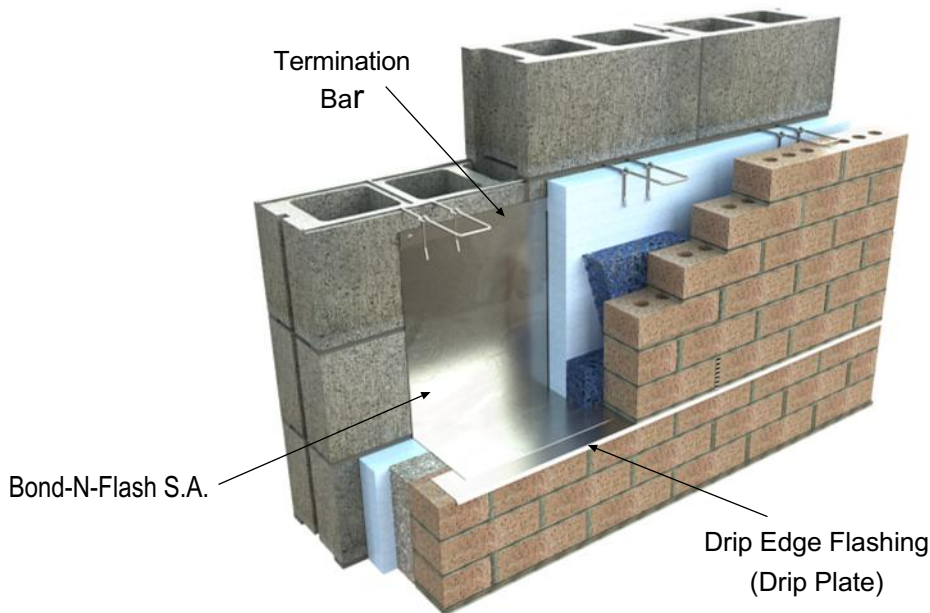

4160 BOND-N-FLASH S.A. (Primerless) Self-Adhering 304 Stainless Steel Flashing

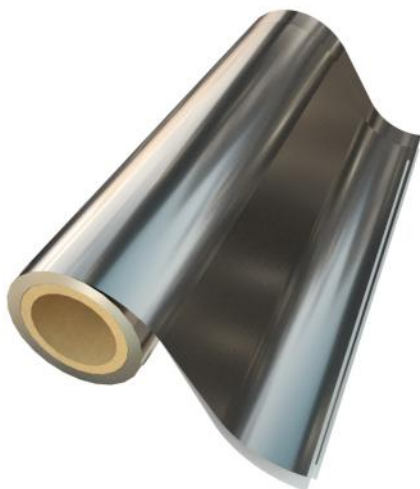

Note: A Termination Bar is required for surface-mounted applications.

Description:

BOND-N-FLASH S.A. stainless steel composite flashing consists of 2 mils of stainless steel (type 304) bonded to a permanent clear (PSA) adhesive with a removable silicone coated release liner. BOND-N-FLASH S.A. is a self-adhering primer-less flashing which can be applied from 20 Degrees F to 180 Degrees F. BOND-N-FLASH S.A. is a primer-less product requiring only the use of **QUIK SET Mastic** for seams and laps.

Features and Benefits:

- No Primer Needed
- 304 Stainless Steel
- Permanent Adhesive
- Permanent UV Resistance
- Fire Resistant
- Mold Resistance
- High Puncture and Tear Resistance
- Flexible for easy job site formation
- Life of the wall warranty

LEED – EA credit 1 and EQ credit 4.1

BOND-N-FLASH S.A. is compatible with most of the insulations, air barriers, roofing membranes, asphaltic flashings and below grade waterproofing products.

Applications:

- Thru-Wall Flashing
- Head and Sill Flashing
- Spandrel Flashing
- Roof-Parapet Flashing
- Perimeter Flashing-Curtain Wall
- Base Flashing
- Transition Membrane
(Waterproofing, Roofing,
Air Barriers)

BOND-N-FLASH S.A.

Weight: 2 mils of stainless steel (type 304) bonded to a permanent clear (PSA) adhesive with a removable silicone coated release liner. Total Thickness: 12 mils.

Width: 12" 18" 24" (75 lf rolls)

Technical Data:

Property	Avg. Values	Test Method
Puncture	2,500 psi	ASTM E154
Tensile Strength	100,000 pas	ASTM D882
Fire Resistance	Class A, Pass	ASTM E84
Mold Resistance	Pass	ASTM 3273
Adhesion	20 lbs/psi	PSTC - 1.1
Stainless Steel certified to meet:		ASTM A240/A240M



www.wirebond.com

Distributed by:
MasonAccess.com
(800) 924-6802