


PRODUCT SUBMITTAL

WIRE-BOND

4193 MAS-N-FLASH SA - Primerless

Self-Adhering 40 Mil Flashing

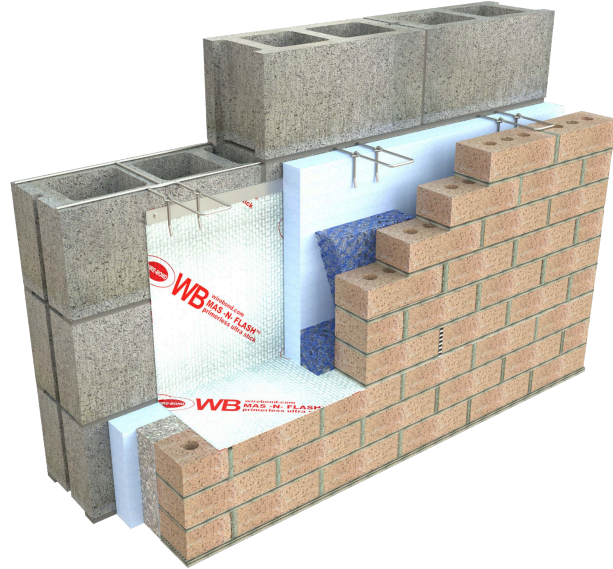

Note: A Termination Bar may not be necessary for surface-mounted applications.

Description:

MAS-N-FLASH SA 40-mil woven coated flashing is a specially designed non-asphaltic, composite membrane with a custom formulated high content Butyl adhesive. The woven coated poly-ethylene base sheet exhibits excellent flexibility, puncture resistance, and tensile / tear strength in both web direction and cross direction. This product is ideal for application to concrete, gypsum, masonry, polystyrene, steel, and wood.

QUICK SET sealant should be used for all laps and joints.

Technical Data:

Property	Avg. Values	Test Method
Tensile Strength	5,230 psi	ASTM D412
Elongation	20 %	ASTM D412
Water Absorption	1.48 %	ASTM E 96
Low Temperature Flexibility	No Cracks	ASTM C765
Water Vapor Transmission	.011 perms	ASTM D751
Mullen Burst	400 psi	ASTM D751

The information presented in this data sheet is believed to be accurate and is not intended to constitute a specification. The values given reflect average measurements, which can vary slightly. Users are encouraged to determine the suitability of this product for their own particular application(s).

MAS-N-FLASH SA- Primerless

Width: ☐ 12" ☐ 18" ☐ 24" (75 lf / rolls)

Sealant (Required):

☐ #4198 Quick Set Sealant - 28 oz. cartridge

Features and Benefits

- Non-Asphaltic
- UV Resistant up to 120 days
- Color : White
- Aggressive Peel & Stick Technology
- Forms Laps and Corners easily
- Split release liner for easy application
- Seals around properly installed fasteners
- With a softening point in excess of 260F, and an asphalt free chemistry MAS-N-FLASH will not drool when exposed to high temperatures.
- No Primer needed
- No VOC's, HFCC's, nor CFC's
- Tear and slice resistant

WIRE-BOND

MasonAccess.com
Masonry Accessories, Inc.
1-800-924-6802

www.wirebond.com