


PRODUCT SUBMITTAL

WIRE-BOND

2401 RJ-711 CMU Backup

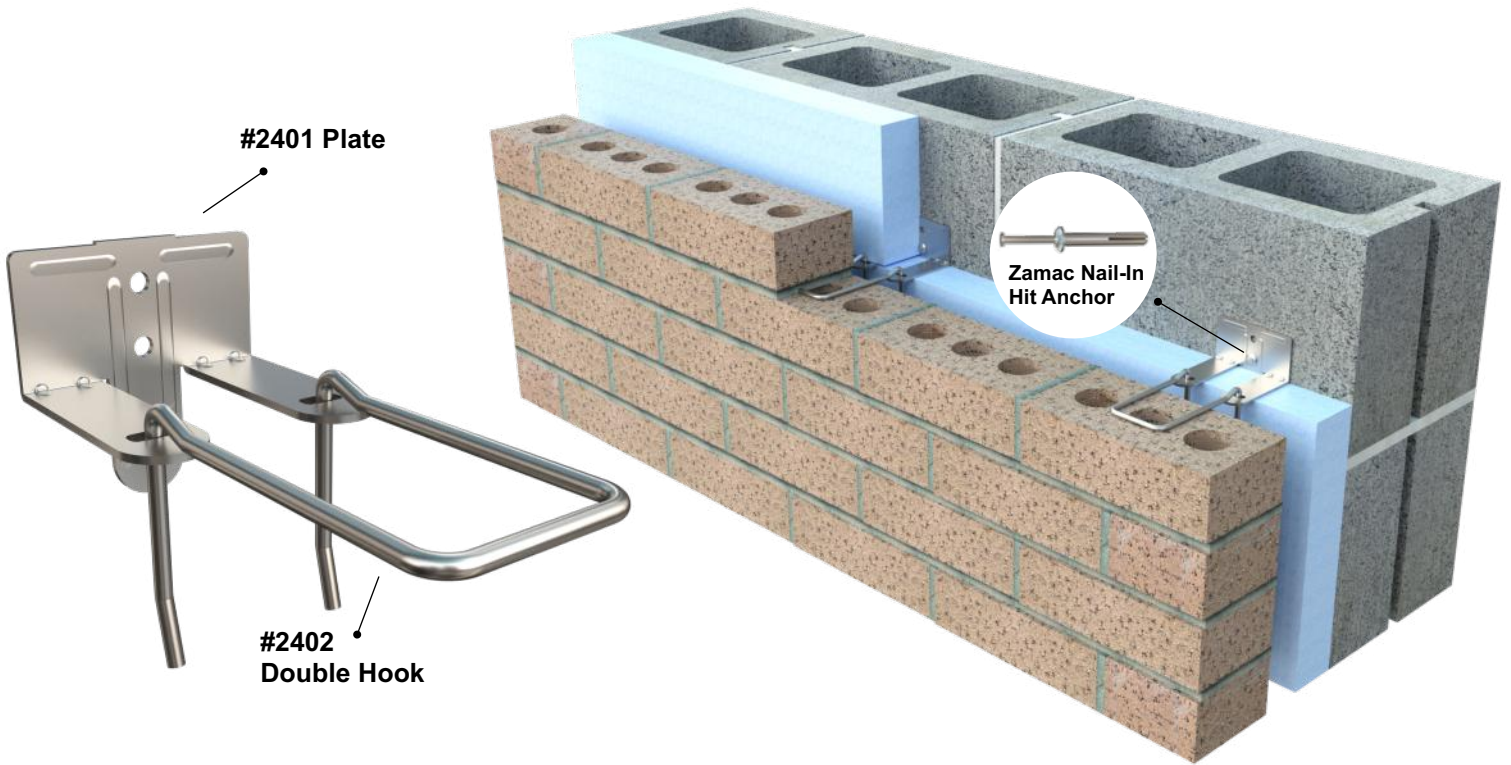

MATERIAL CONFORMANCE

ASTM A1064/A1064M - (Cold drawn steel wire)
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**
Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**
Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:
Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

2401 RJ711:
14 gauge 12 gauge
Must be 3/4" more than insulation

Insulation:
0" 1" 1-1/2" 2" 2-1/2"
3" 3-1/2" 4"

#2402 Double Hook: 3/16" Diameter Standard
3-1/4" 4-1/4" 5-1/4" Other _____

FINISH:
Mill Galvanized
Hot Dip Galvanized
Stainless Steel



WIRE-BOND

www.wirebond.com

Distributed by:

MasonAccess.com

(800) 924-6802