




R-SEAL Construction Tape

Tape for Exterior Insulation and Building Materials

PRODUCT DESCRIPTION

R-SEAL Construction Tape is a 3mil BOPP Film with an acrylic pressure sensitive adhesive. The tape comes in a nominal size of 3" x 165'. R-SEAL Construction Tape has excellent UV resistance for long term performance and a strong bond for weather-tight seals.

PRODUCT CONSTRUCTION

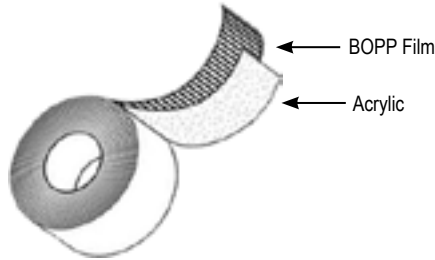

TYPICAL PHYSICAL PROPERTIES

Typical values shown in the chart below are not intended to be used for specification development. Technical data is believed to be true and accurate. Except when used to seal the joints of Thermasheath® and Thermasheath®-SI, Rmax recommends that the purchaser test for fitness of use in all applications.

Property	Standard UOM	Metric UOM	Test Method
Total Thickness	3.2 mils	0.081 mm	ASTM D 1000
Adhesion to Steel	50 oz/in	5.47 N/cm	PSTC-101
Tensile Strength	32 lb/in	56.04 N/cm	ASTM D 1000
Installation Temp.	-5 to 180°F	-20 to 82°C	
Operating Temp.	-40 to 212°F	-40 to 100°C	
Recommended Storage Conditions: 40-60% Humidity, 60-80°F Standard Shelf Life (at 77°F): 24 months from date of manufacture			

MasonAccess.com
Masonry Accessories, Inc.
1-800-924-6802



APPLICATION/INSTALLATION

- All surfaces to which the tape is to be applied should be free of moisture, oils, dust, dirt and other debris that could inhibit adhesion. Clean surfaces with a dry cloth as necessary.
 - Center tape over surface to be sealed, e.g., board joint, fastener plate, etc.
 - Do not allow the tape to form voids or buckle as it is applied.
 - Wipe tape firmly from center out with feathering tool or hand roller to smooth out wrinkles. Applying more pressure yields more surface contact, and therefore, creates a greater bond.
 - Do not tear tape, cut with scissors or knife.
 - **NOTE: For optimal performance, maintain a minimum of 3/4" coverage beyond the area to be sealed.**
-

Rmax Sales Offices and Plant Locations

Central:

13524 Welch Road
Dallas, Texas 75244

Phone: 972-387-4500

Fax: 972-387-4673

Toll Free: 1-800-527-0890

E-mail us at rmax@rmax.com or visit our website www.rmax.com

East:

1649 South Batesville Road
Greer, South Carolina 29650

Phone: 864-297-1382

Fax: 864-234-7548

Toll Free: 1-800-845-4455

West:

210 Lyon Drive
Fernley, Nevada 89408

Phone: 775-575-4849

Fax: 775-575-5035

Toll Free: 1-800-762-9462



Proudly Made and
Engineered in the U.S.A.



Revision.04-15-2020



www.rmax.com | (800) 527-0890