


Termination Bar – Stainless Steel

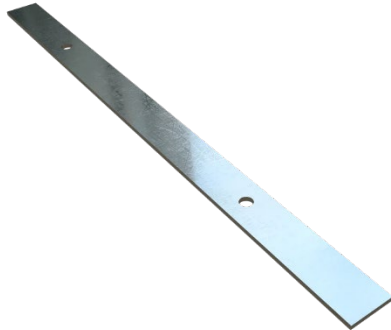

USE:

- Used to surface mount flashing to an existing substrate. Start fastening from one end and proceed to the next hole to avoid bowing. Apply a sealant to the top edge of the bar and feather.

DIMENSIONS:

- Standard 1/8" x 1" wide X 8'0" long with 5/16" diameter, holes 16" o.c. starting 8" from each end

FINISH:

- Stainless Steel – Type 304
ASTM A240/A240M, ASTM A666,
ASTM A480/A480M, and ASTM A167

ADVANTAGES:

- Works with Wood, Metal Stud, CMU & Concrete Substrates
- Long life

FASTENER OPTIONS: [\(Click here for more info\)](#)


- Screws – for Metal Stud Framing



- Screws – for Wood Framing



- Zamac Hammer-Screw – for CMU/Concrete



For technical assistance contact us at 1-800-924-6802 or sales@masonaccess.com

Distributed by:
Masonry Accessories, Inc.
MasonAccess.com

1-800-924-6802
sales@masonaccess.com