


PRODUCT SUBMITTAL



4123 RHINO-BOND SA (Elvaloy Kee) Non-Asphaltic Flashing

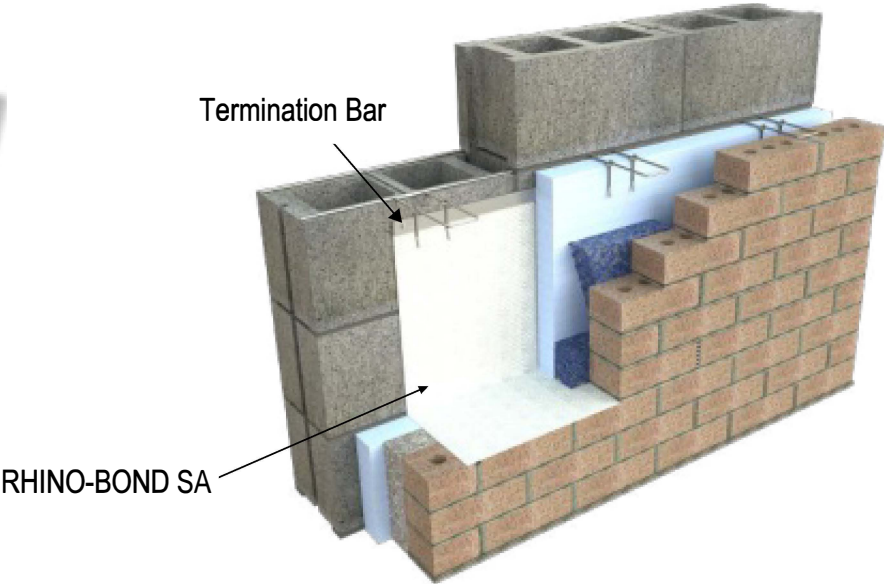

Note: A Termination Bar is recommended for surface-mounted applications.

Description:

RHINO-BOND SA is a non-asphaltic, self adhering flashing that maintains flexibility in extreme cold or heat. RHINO-BOND SA is 40 mils thick consisting of 27 mils of membrane formulated with Dupont's Elvaloy Kee to add strength, 11 mils of butyl adhesive and 2 mils of release paper

Features and Benefits:

- Maintains flexibility in extreme heat or cold.
- Not susceptible to UV degradation.
- High Puncture and Tear Resistance.

Accelerated Weathering Xenon-arc (Biltrite Test) 5000 Hours

Testing Conditions:

Irradiance 35 W/m² @ 340 nm
 Radiance 5040 kJ/m², Black Panel @ 80 C
 Cycle 690 min light, 30 min light plus deionized water spray
 Relative Humidity 50 +/- 5%, Sample Rotation Continuous

Sample Evaluation:

Visual, No cracks or crazing (using 10X magnification)

(Installation Limitations)

Installation Temperature 40°F to 160°F
 Hold Temperature -25°F to

(LEED Information)

Post Industrial Recycled Content: 180°F 55%
 Manufacturing Location: Chelsea, MA

PHYSICAL PROPERTIES

TEST	TEST METHOD	STANDARD
(Adhesive)		
Base	ASTM D-412	Synthetic Rubber
Solvents:	ASTM D-412	None
Solid	ASTM D-412	100%
Thickness, in (mm)	ASTM D-412	0.010 in +/- 0.002
(Overall)		
Thickness, in (mm)	ASTM D-412	in 0.40 in +/- 0.005
Elongation	ASTM D-412	125% (min)
Tensile Strength	ASTM D-412	1000 PSI (min)
Tear Strength	ASTM D-624	175 PPI (min)
Peel Adhesion	ASTM D-903	5-lbs / in (min)
Water Absorption	ASTM D-471	Less than 0.1%

THICKNESS: 40 Mils (1.0mm)

Width: 12" 18" 24" (50 lf rolls)

Sealant (Required):

#4198 Quick Set Sealant - 28 oz. cartridge



MasonAccess.com
 Masonry Accessories, Inc.
 1-800-924-6802