


# PRODUCT SUBMITTAL

WIRE-BOND

## # 2801 Notched Column Anchor

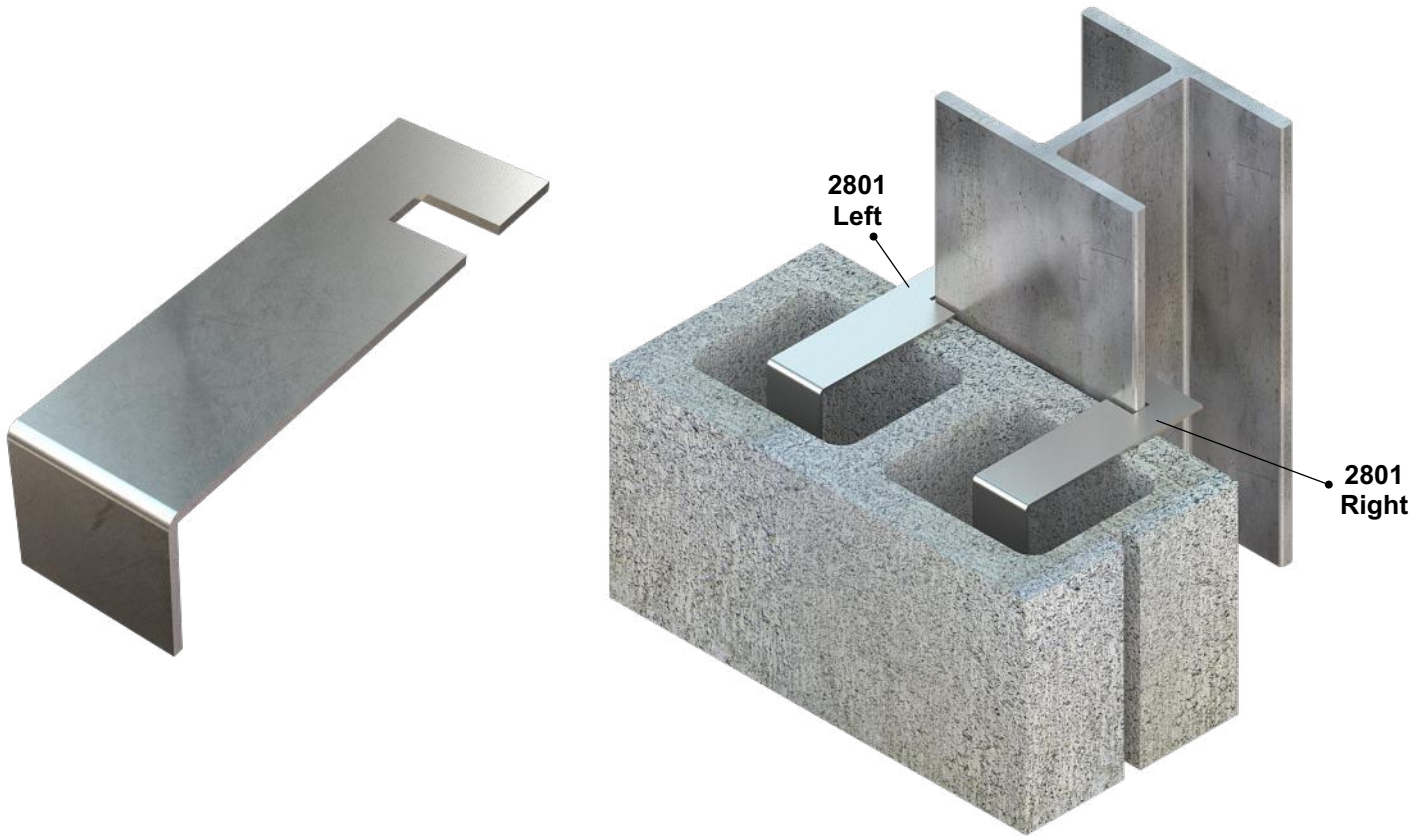

### MATERIAL / CONFORMANCE

#### SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating  
**ASTM A153 / A153M-B2 (1.50 oz per sq ft)**

#### SHEET METAL - Stainless Steel AISI Type 304

**ASTM A 666, ASTM 580 / ASTM 580M, ASTM A480/480M**



#### Recycled Content:

Mill Galvanized & Hot Dipped,  
82.8% Post-Consumer  
17% Post Industrial / Pre-Consumer

Stainless Steel,  
60% Post Consumer  
V O C Content - 0%

### SIZES / FINISHES

#### STANDARD DIMENSIONS

12 gauge thick x 2" wide x 7" long with a 2" bend

#### FLANGE SLOT

5/8" wide x 1" deep located 1" from end

Custom sizes available upon request

#### FINISH:

Mill Galvanized  
Hot Dip Galvanized  
Stainless Steel

WIRE-BOND

[www.wirebond.com](http://www.wirebond.com)

**MasonAccess.com**  
Masonry Accessories, Inc.  
1-800-924-6802